

Digital Pan / Tilt Network Camera



IC - 1520DP




Digital Pan/Tilt/Zoom to expand the viewing area

The IC-1520DP is a compact 1.3 megapixels network camera with digital pan-tilt-zoom to enhance your viewing and monitoring experience. Built-in a wide angle lens, the IC-1520DP has a panorama of 128° in horizontal and 99° in vertical. You can use a smaller viewing window to move around like a magnifier. With a preset path, the IC-1520DP will cruise along the path. The IC-1520DP breaks the viewing area limit and provides the flexibility to meet your needs.



Digital Pan / Tilt

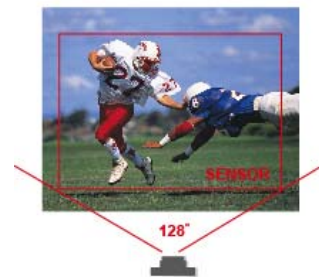

Full Vision Viewing

Fast Center Zoom-in


When something catches your attention, you can zoom-in to see the details and record at the same time. You won't miss a tiny thing. The IC-1520DP brings you the benefit of both the panoramic view and the detail view.

Motion Detection and Snapshots the Triggered Event by E-mail and FTP

The IC-1520DP is a powerful surveillance system. When the motion detection mode is on, the IC-1520DP will snapshot the triggered event and send it by email or to a FTP server. You don't have to look at the monitor all the time. The IC-1520DP can guard the surveillance area automatically.

Supports DDNS & UPnP

The IC-1520DP can stream the live video to a local network and Internet. With DDNS features, you can assign a domain name to the IC-1520DP. To view the video from Internet because you only need to type the domain name (like www.edimax.com) in the browser address bar in stead of the IP address. UPnP allows Window XP/Vista users access the IC-1520DP by clicking the icon on the screen system tray without knowing the IP address.



Headquarters
Edimax Technology Co., LTD.
TEL: +886-2-7739-6888
FAX: +886-2-7739-6887
sales@edimax.com.tw

Poland Office
Edimax Technology Poland SP. Z o.o.
TEL: +48-22-6079-480
FAX: +48-22-6079-481
sales@edimax.pl

Romania Office
Edimax Technology Romania
TEL: +40-31-4250126
FAX: +40-31-4250125
sales@edimax.cn

Russia Office
Edimax Technology Russia
TEL: +7-495-921-0239
FAX: +7-495-921-0239
sales@edimax.pl

European Headquarters
Edimax Technology Europe B.V.
TEL: +31-499-377344
FAX: +31-499-372647
sales@edimax.nl

United Kingdom Office
Edimax Computer Company
TEL: +44-845-1238307
FAX: +44-845-1238306
info@edimax.co.uk

Germany Office
Edimax Technology Europe BV
TEL: +49-215488-2831
FAX: +49-215488-2834
e-mail: sales@edimax-de.eu

U.S.A. Office
Edimax Computer Company
TEL: +1-408-496-1105
FAX: +1-408-980-1530
sales@edimax.com

Latin America Office
Edimax Latin America Inc.
TEL: +1-786-845-8099
FAX: +1-786-331-8490
sales_latina@edimax.com

China Office
Beijing Edimax Science & Technology Co., Ltd.
TEL: +86-10-8266-5815
FAX: +86-10-8266-5795
sales@edimax.cn


FEATURES AND TECHNICAL SPECIFICATIONS

INTERFACE	MANAGEMENT	POWER ADAPTER
<ul style="list-style-type: none"> ✿ 1 Ethernet (RJ-45) Port ✿ 1 Power Jack ✿ 1 Reset Button 	<ul style="list-style-type: none"> ✿ Provides Admin Utility, Camera Viewer & Web browser management ✿ Firmware upgradeable 	<ul style="list-style-type: none"> ✿ DC 12V, 0.4A
LED	HARDWARE	HUMIDITY
<ul style="list-style-type: none"> ✿ LAN ✿ Power 	<ul style="list-style-type: none"> ✿ 1.3M Pixels CMOS Sensor ✿ Manual Focus, F= 2.0 ✿ 2 MB Flash ✿ 16 MB SDRAM ✿ FOV Horizontal: 128 degrees Vertical: 99 degrees 	<ul style="list-style-type: none"> ✿ 10-90% (Non-condensing)
FUNCTIONS	DIMENSION & TEMPERATURE	CERTIFICATIONS
<ul style="list-style-type: none"> ✿ View multiple cameras simultaneously - Up to 4 cameras within the local network or anywhere in the world via the Internet ✿ Supports one administrator account and four user accounts ✿ Sending snapshot to email and ftp server on a predetermined schedule ✿ Provides manual focus lens ✿ Supports login free ✿ Supports motion-detection by sending the snapshot of events to email and ftp server ✿ Records video clips manually or on a predetermined schedule ✿ Supports video playback ✿ Recording format – Video (AVI) ✿ Snapshot format – Picture (JPEG) 	<ul style="list-style-type: none"> ✿ 114 X 79 X 50 mm ✿ 0~45 Degree Celsius 	<ul style="list-style-type: none"> ✿ CE, FCC
	SYSTEM REQUIREMENTS	
	<ul style="list-style-type: none"> ✿ Windows 98/ME/2000/XP/2003/Vista ✿ Internet Explorer 6.x and above ✿ xDSL broadband router 	

NETWORK SETUP DIAGRAM AND RELATED PRODUCTS

An example of how the IC-1520DP can be setup:

- Connect the IC-1520DP to your Broadband Router's Ethernet (RJ45) LAN port .
- Install the Admin Utility into your PC and configure the IC-1520DP.
- All computers in the local network can now view the IC-1520DP.
- To view the IC-1520DP via the Internet, open the http and video ports in the router. Then, you can watch live video from anywhere in the world.

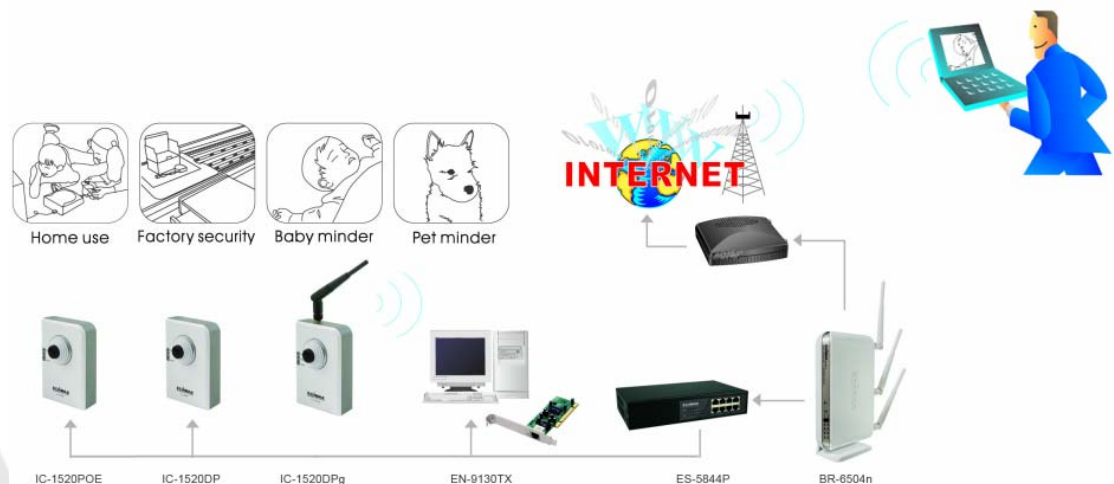

EDIMAX
NETWORKING PEOPLE TOGETHER

EDIMAX TECHNOLOGY CO., LTD.