

# Digital Pan / Tilt Wireless Network Camera

IC - 1520DPg




## Digital Pan/Tilt/Zoom to expand the viewing area

The IC-1520DPg is a compact 1.3 megapixels network camera with digital pan-tilt-zoom to enhance your viewing and monitoring experience. Built-in a wide angle lens, the IC-1520DPg has a panorama of 128° in horizontal and 99° in vertical. You can use a smaller viewing window to move around like a magnifier. With a preset path, the IC-1520DPg will cruise along the path. The IC-1520DPg breaks the viewing area limit and provides the flexibility to meet your needs.



Digital Pan / Tilt

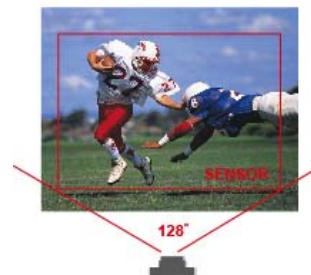

Full Vision Viewing

## Fast Center Zoom-in

When something catches your attention, you can zoom-in to see the details and record at the same time. You won't miss a tiny thing. The IC-1520DPg brings you the benefit of both the panoramic view and the detail view.

## Motion Detection and Snapshots the Triggered Event by E-mail and FTP

The IC-1520DPg is a powerful surveillance system. When the motion detection mode is on, the IC-1520DPg will snapshot the triggered event and send it by email or to a FTP server. You don't have to look at the monitor all the time. The IC-1520DPg can guard the surveillance area automatically.

## Supports DDNS & UPnP

The IC-1520DPg can stream the live video to a local network and Internet. With DDNS features, you can assign a domain name to the IC-1520DPg. To view the video from Internet because you only need to type the domain name (like www.edimax.com) in the browser address bar in stead of the IP address. UPnP allows Window XP/Vista users access the IC-1520DPg by clicking the icon on the screen system tray without knowing the IP address.



This equipment is intended to be used in all Europe and EFTA countries. Herby Edimax Technology declares that this product is in conformity with the European R&TTE Directive (1999/5/EC). A declaration of conformity is available on [www.edimax.com](http://www.edimax.com)

**EDIMAX**  
NETWORKING PEOPLE TOGETHER

**Headquarters**  
Edimax Technology Co., LTD.  
TEL: +886-2-7739-6888  
FAX: +886-2-7739-6887  
sales@edimax.com.tw

**Poland Office**  
Edimax Technology Poland SP. Z o.o.  
TEL: +48-22-6079-480  
FAX: +48-22-6079-481  
sales@edimax.pl

**Romania Office**  
Edimax Technology Romania  
TEL: +40-31-4250126  
FAX: +40-31-4250125  
sales@edimax.cn

**Russia Office**  
Edimax Technology Russia  
TEL: +7-495-921-0239  
FAX: +7-495-921-0239  
sales@edimax.pl

**European Headquarters**  
Edimax Technology Europe B.V.  
TEL: +31-499-377344  
FAX: +31-499-372647  
sales@edimax.nl

**United Kingdom Office**  
Edimax Computer (UK) Ltd.  
TEL: +44-845-1238307  
FAX: +44-845-1238306  
info@edimax.co.uk

**Germany Office**  
Edimax Technology Europe BV  
TEL: +49-215488-2831  
FAX: +49-215488-2834  
e-mail: sales@edimax-de.eu

**U.S.A. Office**  
Edimax Computer Company  
TEL: +1-408-496-1105  
FAX: +1-408-980-1530  
sales@edimax.com

**Latin America Office**  
Edimax Latin America Inc.  
TEL: +1-786-845-8099  
FAX: +1-786-331-8490  
sales\_latnamerica@edimax.com

**China Office**  
Beijing Edimax Science & Technology Co., Ltd.  
TEL: +86-10-8266-5815  
FAX: +86-10-8266-5795  
sales@edimax.cn


## FEATURES AND TECHNICAL SPECIFICATIONS

INTERFACE	MANAGEMENT	POWER ADAPTER
<ul style="list-style-type: none"> <li>• 1 Ethernet ( RJ-45) Port</li> <li>• 1 Power Jack</li> <li>• 1 Reset Button</li> <li>• 1 External Detachable Antenna</li> </ul>	<ul style="list-style-type: none"> <li>• Provides Admin Utility, Camera Viewer &amp; Web browser management</li> <li>• Firmware upgradeable</li> </ul>	<ul style="list-style-type: none"> <li>• DC 12V, 0.4A</li> </ul>
LED	HARDWARE	HUMIDITY
<ul style="list-style-type: none"> <li>• LAN</li> <li>• WLAN</li> <li>• Power</li> </ul>	<ul style="list-style-type: none"> <li>• 1.3M Pixels CMOS Sensor</li> <li>• Manual Focus, F= 2.0</li> <li>• 2 MB Flash</li> <li>• 16 MB SDRAM</li> <li>• FOV Horizontal: 128 degrees Vertical: 99 degrees</li> </ul>	<ul style="list-style-type: none"> <li>• 10-90% (Non-condensing)</li> </ul>
FUNCTIONS	DIMENSION & TEMPERATURE	CERTIFICATIONS
<ul style="list-style-type: none"> <li>• View multiple cameras simultaneously - Up to 4 cameras within the local network or anywhere in the world via the Internet</li> <li>• Supports one administrator account and four user accounts</li> <li>• Sending snapshot to email and ftp server on a predetermined schedule</li> <li>• Provides manual focus lens</li> <li>• Supports login free</li> <li>• Supports motion-detection by sending the snapshot of events to email and ftp server</li> <li>• Records video clips manually or on a predetermined schedule</li> <li>• Supports video playback</li> <li>• Recording format – Video (AVI)</li> <li>• Snapshot format – Picture (JPEG)</li> </ul>	<ul style="list-style-type: none"> <li>• 114 X 79 X 50 mm</li> <li>• 0~45 °C</li> </ul>	<ul style="list-style-type: none"> <li>• CE, FCC</li> </ul>
	SYSTEM REQUIREMENTS	
	<ul style="list-style-type: none"> <li>• Windows 98/ME/2000/XP/2003/Vista</li> <li>• Internet Explorer 6.x and above</li> <li>• xDSL broadband router</li> </ul>	

### NETWORK SETUP DIAGRAM AND RELATED PRODUCTS

#### An example of how the IC-1520DPg can be setup:

- Connect the IC-1520DPg to PC by Ethernet (RJ45) LAN port.
- Install the Admin Utility into your PC and set up the IC-1520DPg IP subnet as same as Broadband Router's.
- Configure IC-1520DPg with Broadband Router via wireless connection.
- All computers in the local network can now view the IC-1520DPg.
- To view the IC-1520DPg via the Internet, open the http and video ports in the router. Then, you can watch live video from anywhere in the world.

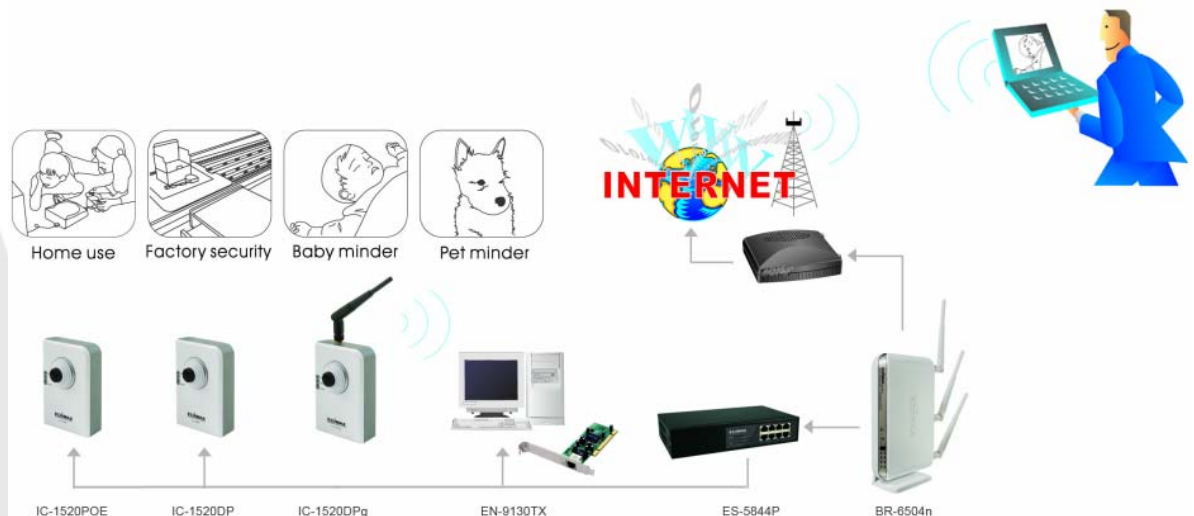

**EDIMAX**  
NETWORKING PEOPLE TOGETHER

EDIMAX TECHNOLOGY CO., LTD.